




## 370W PERC Double Glass Module JAM72D00 350-370/PR Series

### Introduction

These double-glass modules are powered by PERC cells to provide high power output with higher energy generation at low-irradiance conditions and better temperature-dependent performance, as well as excellent reliability and durability during the lifespan of their deployment in the field.

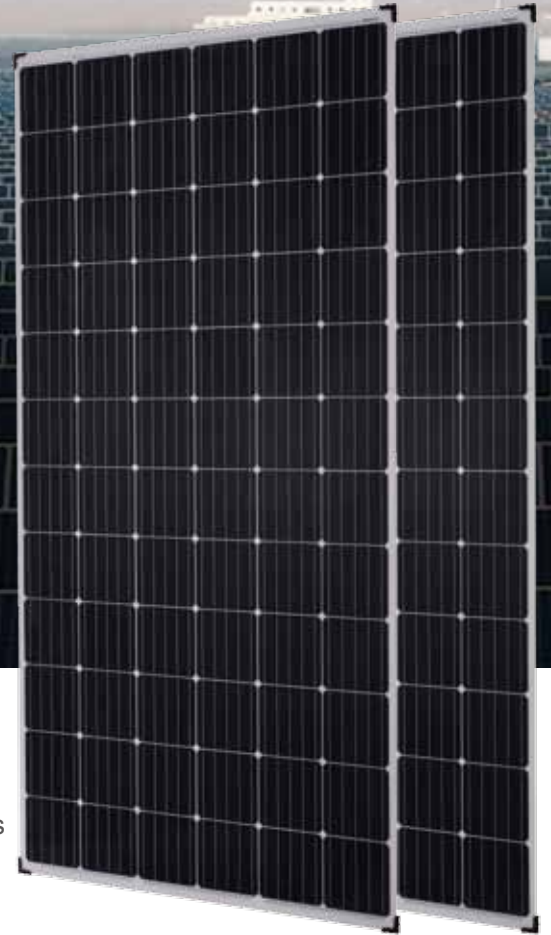

PID resistant and free of snail trails



Increased module robustness to minimize micro-cracks



Fire class A enhanced safety




Suitable for harsh environments, such as coasts, deserts and lakes

### Superior Warranty

- 12-year product warranty
- 30-year linear power output warranty

0.5% Annual Degradation Over 30 years

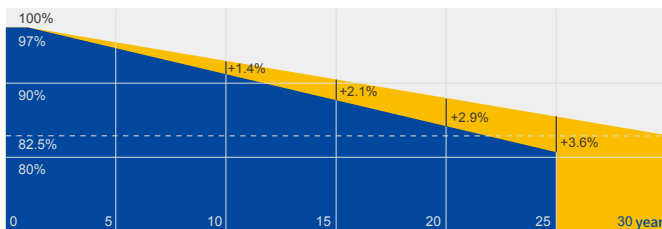


■ Additional Value From 30-Year Warranty ■ JA Standard

### Comprehensive Certificates

- IEC 61215, IEC 61730, IEC TS 62804, IEC 61701, IEC 62716, IEC 60068-2-68
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



**MECHANICAL DIAGRAMS**

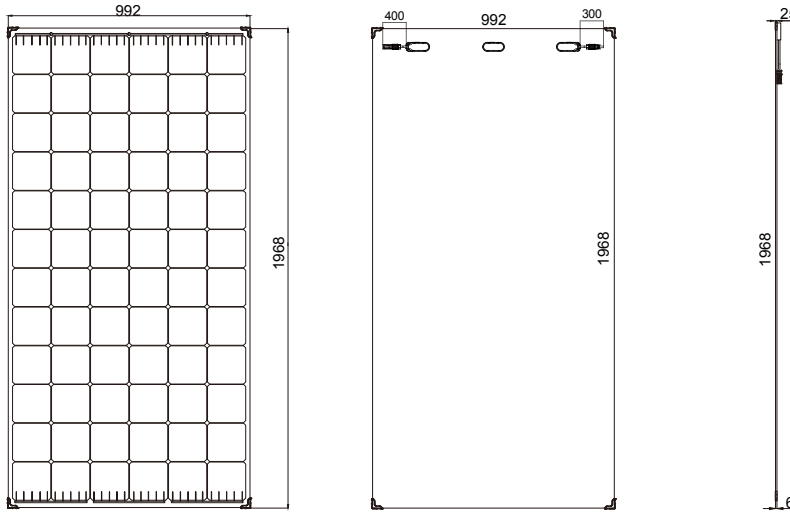

Remark: customized cable length available upon request

**SPECIFICATIONS**

Cell	Mono
Weight	28kg±3%
Dimensions	1968mm×992mm×6mm (1968mm×992mm×25mm with junction box)
Cable Cross Section Size	4mm <sup>2</sup>
No. of cells	72(6x12)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-35
Packaging Configuration	30 Per Pallet

**ELECTRICAL PARAMETERS AT STC**

TYPE	JAM72D00 -350/PR	JAM72D00 -355/PR	JAM72D00 -360/PR	JAM72D00 -365/PR	JAM72D00 -370/PR
Rated Maximum Power(Pmax) [W]	350	355	360	365	370
Open Circuit Voltage(Voc) [V]	47.28	47.59	47.90	48.18	48.43
Maximum Power Voltage(Vmp) [V]	38.72	38.93	39.18	39.45	39.70
Short Circuit Current(Isc) [A]	9.52	9.58	9.65	9.72	9.78
Maximum Power Current(Imp) [A]	9.04	9.12	9.19	9.26	9.32
Module Efficiency [%]	18.0	18.2	18.4	18.7	19.0
Power Tolerance	0~+5W				
Temperature Coefficient of Isc( $\alpha_{Isc}$ )	+0.059%/°C				
Temperature Coefficient of Voc( $\beta_{Voc}$ )	-0.300%/°C				
Temperature Coefficient of Pmax( $\gamma_{Pmp}$ )	-0.380%/°C				
STC	Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G				

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

**ELECTRICAL PARAMETERS AT NOCT**


TYPE	JAM72D00 -350/PR	JAM72D00 -355/PR	JAM72D00 -360/PR	JAM72D00 -365/PR	JAM72D00 -370/PR
Rated Max Power(Pmax) [W]	259	263	266	270	274
Open Circuit Voltage(Voc) [V]	43.68	43.88	44.10	44.41	44.63
Max Power Voltage(Vmp) [V]	35.92	35.94	36.20	36.40	36.65
Short Circuit Current(Isc) [A]	7.63	7.70	7.76	7.81	7.86
Max Power Current(Imp) [A]	7.21	7.31	7.36	7.42	7.47
NOCT	Irradiance 800W/m <sup>2</sup> , ambient temperature 20°C, wind speed 1m/s, AM1.5G				

**OPERATING CONDITIONS**


Maximum System Voltage	1500V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Static Load,Front	5400Pa
Maximum Static Load,Back	2400Pa
NOCT	45±2°C
Application Class	Class A

**CHARACTERISTICS**

Current-Voltage Curve JAM72D00-355/PR

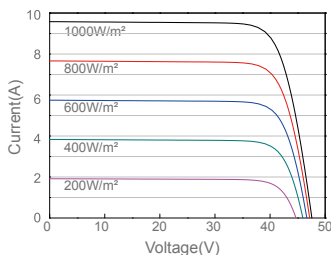

Power-Voltage Curve JAM72D00-355/PR

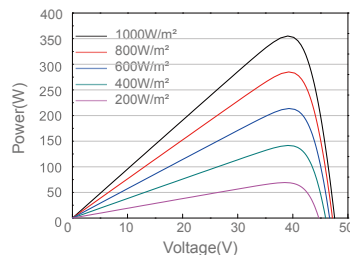

Current-Voltage Curve JAM72D00-355/PR

